


# LBB 3422/20 Symmetrical Audio Input and Interpreter Module

www.boschsecurity.com



**BOSCH**  
Invented for life

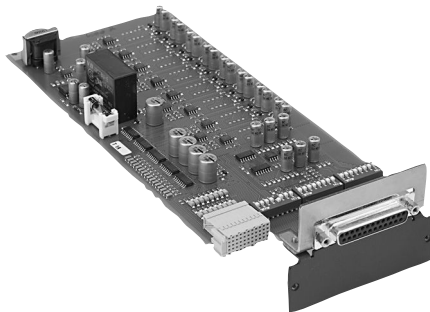

- ▶ Direct connection of up to 12 LBB 3222/04 Interpreter Desks for six languages
- ▶ Routing of floor signal (for instance from a CCS 900 discussion system) to interpreter desks
- ▶ Eight symmetrical inputs
- ▶ Facility for mounting input transformers for galvanic isolation between audio source and the transmitter

The LBB 3422/20 Symmetrical Audio Input and Interpreters Module is used for interfacing the transmitter with the CCS 900 discussion systems and the LBB 3222/04 6-Channel Interpreter Desk with Loudspeaker. Different connections and switch settings are possible to also allow the module to be used with non-Bosch systems.

## Functions

### Controls and Indicators

- On-board switches can be set for directly connecting interpreter desks (LBB 3222/04) or other audio sources
- An on-board switch can be used to match the amplification of floor signals from CCS 900 or from other analogue conference systems
- An on-board switch can be used to replace the interpretation signal with the floor signal for distribution to the listeners when an interpreter channel is not in use

### Interconnection

- Symmetrical analogue audio input; 25-pole female sub-D connector
- Audio and data bus connector; H 15 male connector

## Certifications and approvals

Region	Certification
Europe	CE

## Technical specifications

### Electrical

Audio input level with AGC	-16.5 dBV (150 mVeff) to +3.5 dBV (1500 mVeff)
Audio input level without AGC	-4.4 dBV (600 mVeff)
Asymmetric input impedance	≥ 10 kohm
DC input impedance	≥ 200 kohm

### Mechanical

Mounting	Front panel is removed when used with INT-TX Integrus Transmitter
Dimensions (H x W x D) without front panel	100 x 26 x 231 mm (39 x 10 x 91 in)
Weight without front panel	132 g (0.29 lb)

## Ordering information

### LBB 3422/20 Symmetrical Audio Input and Interpreter Module

Used for interfacing the Integrus transmitter with the CCS 900 discussion systems and the LBB 3222/04 6-Channel Interpreter Desk.

Order number **LBB3422/20**

---

#### Represented by:

##### Americas:

Bosch Security Systems, Inc.  
12000 Portland Avenue South  
Burnsville MN 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschsecurity.com

##### Europe, Middle East, Africa:

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

##### Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

##### China:

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

##### America Latina:

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com